
versatile™ 4C Surface Mount Collar, SM08S

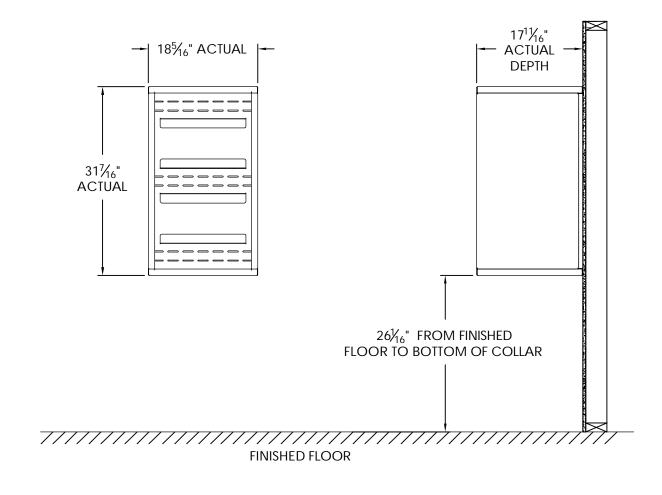


Notes

- Designed to mount Florence Versatile[™] 4C mailbox single column 8-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES: VERSATILETM 4	VERSATILE™ 4C SURFACE MOUNT COLLAR				
	MODEL	SM08S	C C		
	SCALE	NONE	AST REV DATE 7/02/2014		
	DRAW	NG NUMBER	DRAWN BY		
		SM08SCS	TNS		

versatileTM 4C Mailbox, 4C08S-03

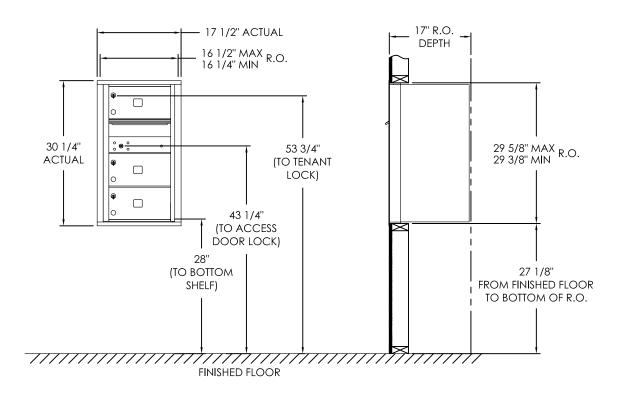

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB2	6-1/2" H x 12" W x 15" D	3
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL 4	C08S-03	REV	С
SCALE	NONE	LAS	t rev date 07/01/19
DRAWING	NUMBER		DRAWN BY
4C08S-03CS			RAK