


17" MIN. R.O. DEPTH

39 13/16"+1/4" R.O. -0

17 1/2" ACTUAL
16 1/4" R.O.

40 3/4" ACTUAL

INSTALLATION EXAMPLE

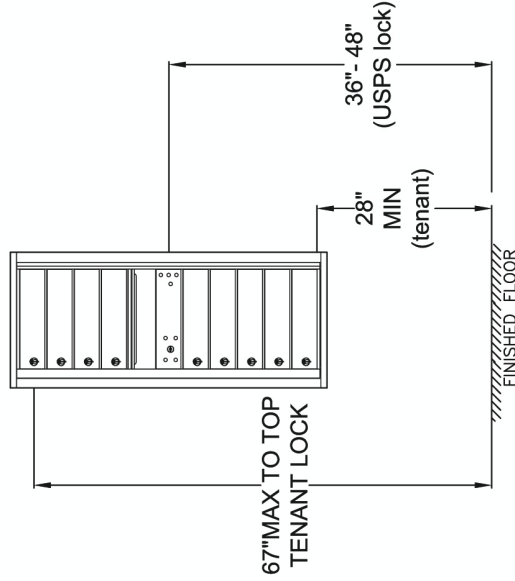

67" MAX TO TOP TENANT LOCK

28" MIN (tenant)

36" - 48" (USPS lock)

FINISHED FLOOR

Installation requirements specified in USPS STD-4C include:

1. At least one customer compartment shall be positioned less than 48" from the finished floor.
2. No parcel locker (interior bottom shelf) shall be positioned less than 15" from finished floor.
3. No patron (tenant) lock shall be positioned more than 67" above finished floor.
4. No customer compartment (interior bottom shelf) shall be positioned less than 28" from finished floor.
5. The USPS Arrow lock shall be positioned 36" - 48" above finished floor.

1st Mailbox Works
www.MailboxWorks.com
800.824.9985
info@mailboxworks.com

PRODUCT SERIES: VERSATILE™ 4C SUITE H
FRONT LOAD

by Auth Florence		MODEL	4CHT6-9	REV	-
SCALE	NONE	DATE	3/25/08	DRAWN BY	SHEET
DRAWING NUMBER	4CHT69CS	SAD	1	OF	1