
versatile™ 4C Surface Mount Collar, SM06D 17¹/₁₆" ACTUAL - 32 $\frac{3}{8}$ " ACTUAL — DEPTH 24½" ACTUAL $26\frac{1}{16}$ " FROM FINISHED FLOOR TO BOTTOM COLLAR FINISHED FLOOR

Notes:

- Designed to mount Florence Versatile[™] 4C mailbox double column 6-High Suite modules (sold separately).
- 2. For use with front loading modules only.

| PRODUCT SERIES: VERSATILETM 4C SURFACE MOU | UNT COLLAR | | |
|--|----------------|-----|--------------------------------|
| | | | |
| | | | |
| | MODEL SM06D | REV | B |
| | SCALE NONE | | t rev date 7/02/2014 |
| | DRAWING NUMBER | • | DRAWN BY |
| | SM06DCS | | TNS |
| | | | |

versatile™ 4C Mailbox, 4C06D-2P

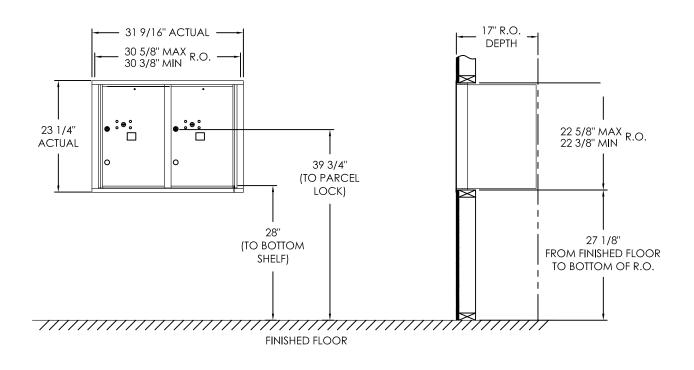

COMPARTMENT CHART

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

| MODEL | 4C06D-2P | REV | D |
|--------|-----------|-----|---------------------|
| SCALE | NONE | LAS | T REV DATE 06/28/19 |
| DRAWIN | IG NUMBER | | DRAWN BY |
| 40 | C06D-2PCS | | RAK |
| | | | |