
versatile™ 4C Surface Mount Collar, SM11D 17¹½6" ACTUAL — — 32¾" ACTUAL — DEPTH 41¹⁵/₁₆" ACTUAL 26½" FROM FINISHED FLOOR TO BOTTOM OF COLLAR FINISHED FLOOR

Notes

- Designed to mount Florence Versatile[™] 4C mailbox double column 11-High Suite modules (sold separately).
- 2. For use with front loading modules only.

| PRODUCT SERIES: VERSATILETM 4C SURFACE MOUN | VERSATILE™ 4C SURFACE MOUNT COLLAR | | | | |
|---|------------------------------------|-----------|--|--|--|
| | MODEL SM11D | REV B | | | |
| | SCALE NONE | 7/02/2014 | | | |
| | DRAWING NUMBER | DRAWN BY | | | |
| | SM11DCS | TNS | | | |
| | l | | | | |

versatileTM 4C Mailbox, 4C11D-09

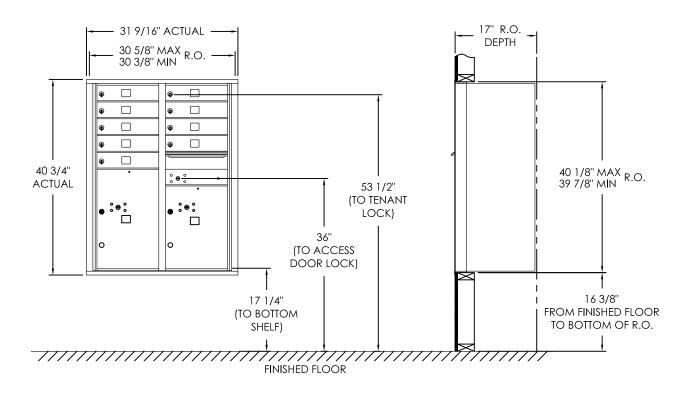

COMPARTMENT CHART

| DESCRIPTION | COMPARTMENT | COMPARTMENT SIZE | QTY. |
|---------------|-------------|---------------------------|------|
| MAILBOX | MB1 | 3" H x 12" W x 15" D | 9 |
| OUTGOING MAIL | OM2 | 6-1/2" H x 12" W x 15" D | 1 |
| PARCEL | PL5 | 17" H x 12" W x 15" D | 1 |
| PARCEL | PL6 | 20-1/2" H x 12" W x 15" D | 1 |

Notes

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

| MODEL 4C11D-09 | F |
|----------------|---------------------|
| SCALE NONE LA | ST REV DATE 1/26/21 |
| DRAWING NUMBER | DRAWN BY |
| 4C11D-09CS | NBC |
| | |