
versatile™ 4C Surface Mount Collar, SM11D 17¹½6" ACTUAL — — 32¾" ACTUAL — DEPTH 41¹⁵/₁₆" ACTUAL 26½" FROM FINISHED FLOOR TO BOTTOM OF COLLAR FINISHED FLOOR

Notes

- Designed to mount Florence Versatile[™] 4C mailbox double column 11-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES: VERSATILETM 4C SURFACE MO	VERSATILE™ 4C SURFACE MOUNT COLLAR		
	MODEL SM11D	REV B	
	SCALE NONE	7/02/2014	
	DRAWING NUMBER	DRAWN BY	
	SM11DCS	TNS	

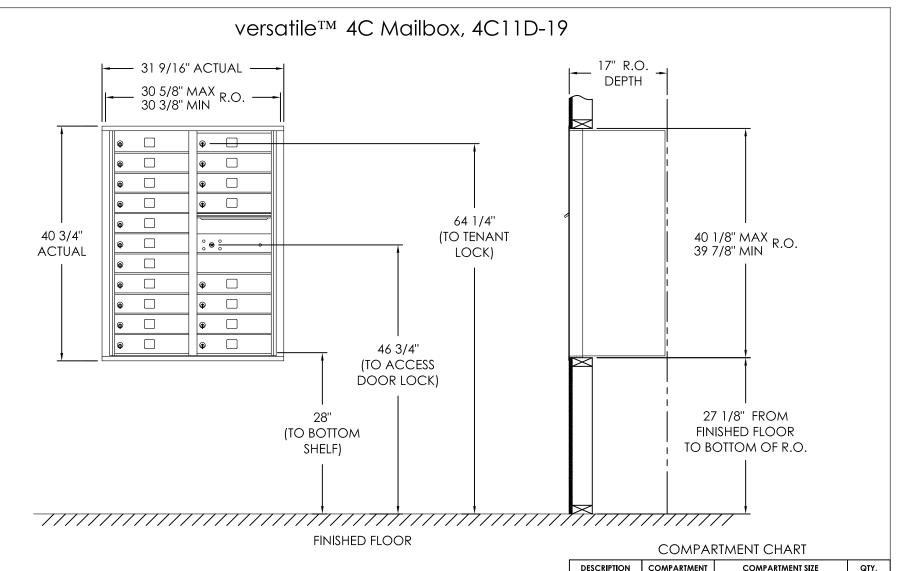

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

 DESCRIPTION
 COMPARTMENT
 COMPARTMENT SIZE
 QTY.

 MAILBOX
 MB1
 3" H x 12" W x 15" D
 19

 OUTGOING MAIL
 OM3
 10" H x 12" W x 15" D
 1

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL 4	C11D-19	REV	F
SCALE	NONE	LAS	T REV DATE 07/01/19
DRAWING	NUMBER		DRAWN BY
4C	11D-19CS		RAK