
versatile™ 4C Surface Mount Collar, SM13D

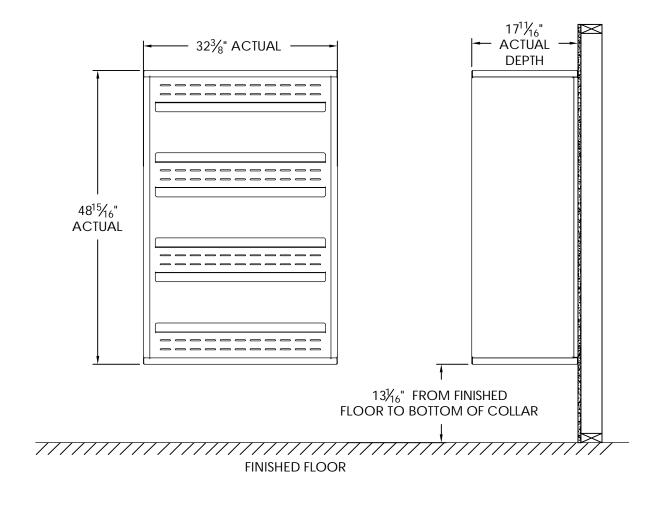


Notes

- Designed to mount Florence Versatile[™] 4C mailbox double column 13-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES:	VERSATILE™ 4C SURFACE MOUNT COLLAR								
		MODEL (SM13D	REV	В				
		SCALE	NONE	LAS 7	t rev date 7/02/2014				
		DRAWING	G NUMBER		DRAWN BY				
		S	M13DCS		TNS				

versatile™ 4C Mailbox, 4C13D-13

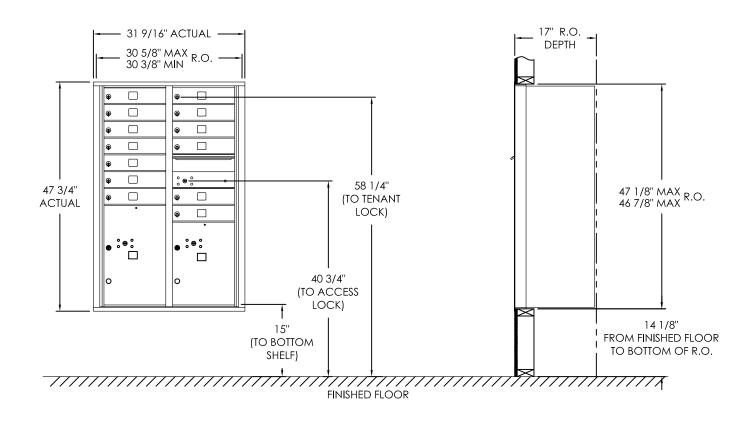

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.						
MAILBOX	MB1	3" H x 12" W x 15" D	13						
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1						
PARCEL	PL5	17" H x 12" W x 15" D	- 1						
PARCEL	PL6	20-1/2" H x 12" W x 15" D	1						

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL 4C13D-13		REV	D	
SCALE	NONE	LAS	T REV DATE 07/09/19	
DRAWING	NUMBER		DRAWN BY	
4C13D-13CS			RAK	