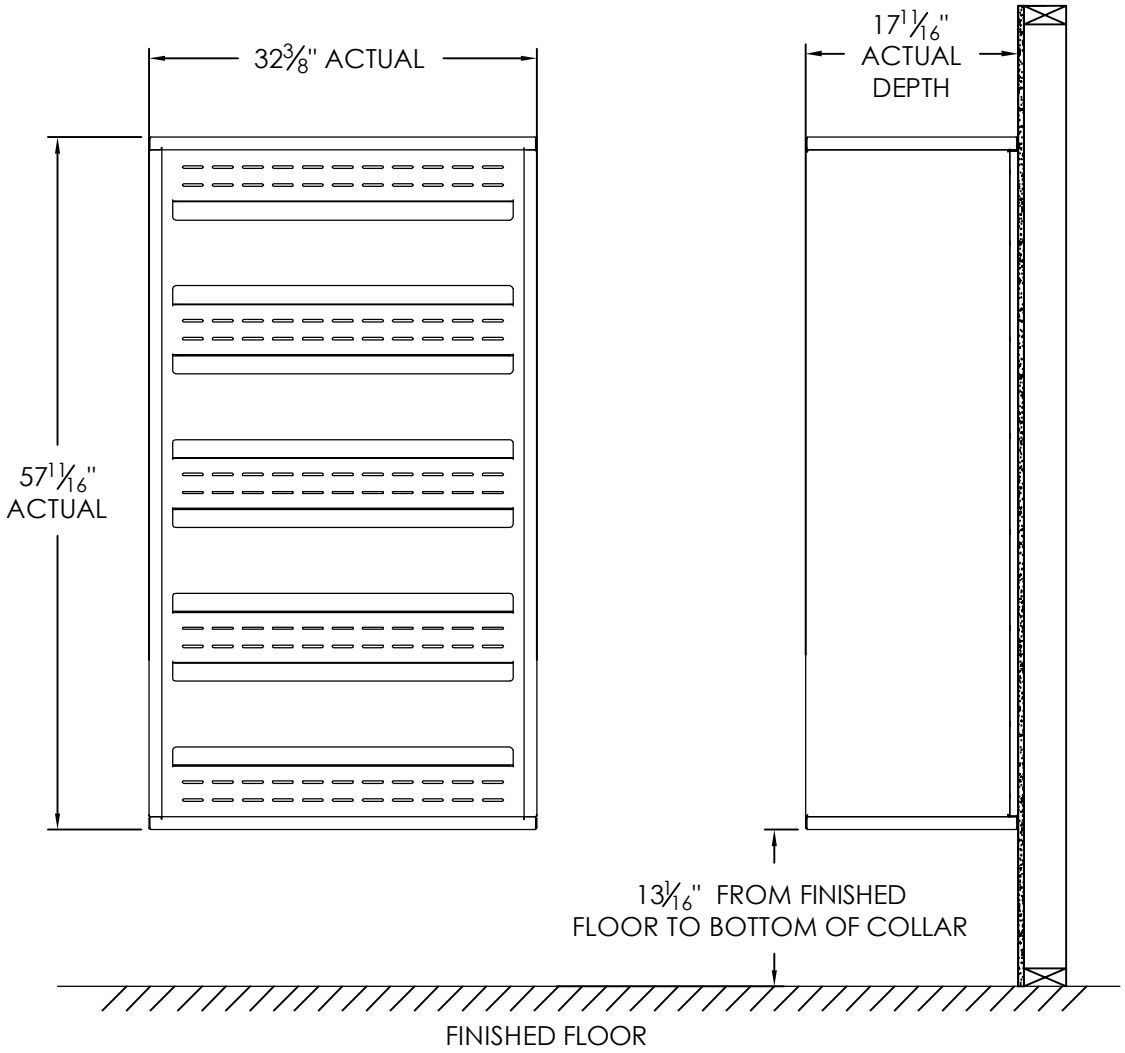
32 3/8" ACTUAL
17 1/16" ACTUAL DEPTH
57 1/16" ACTUAL
13 1/16" FROM FINISHED FLOOR TO BOTTOM OF COLLAR
FINISHED FLOOR

versatile™ 4C Mailbox, 4C16D-6P

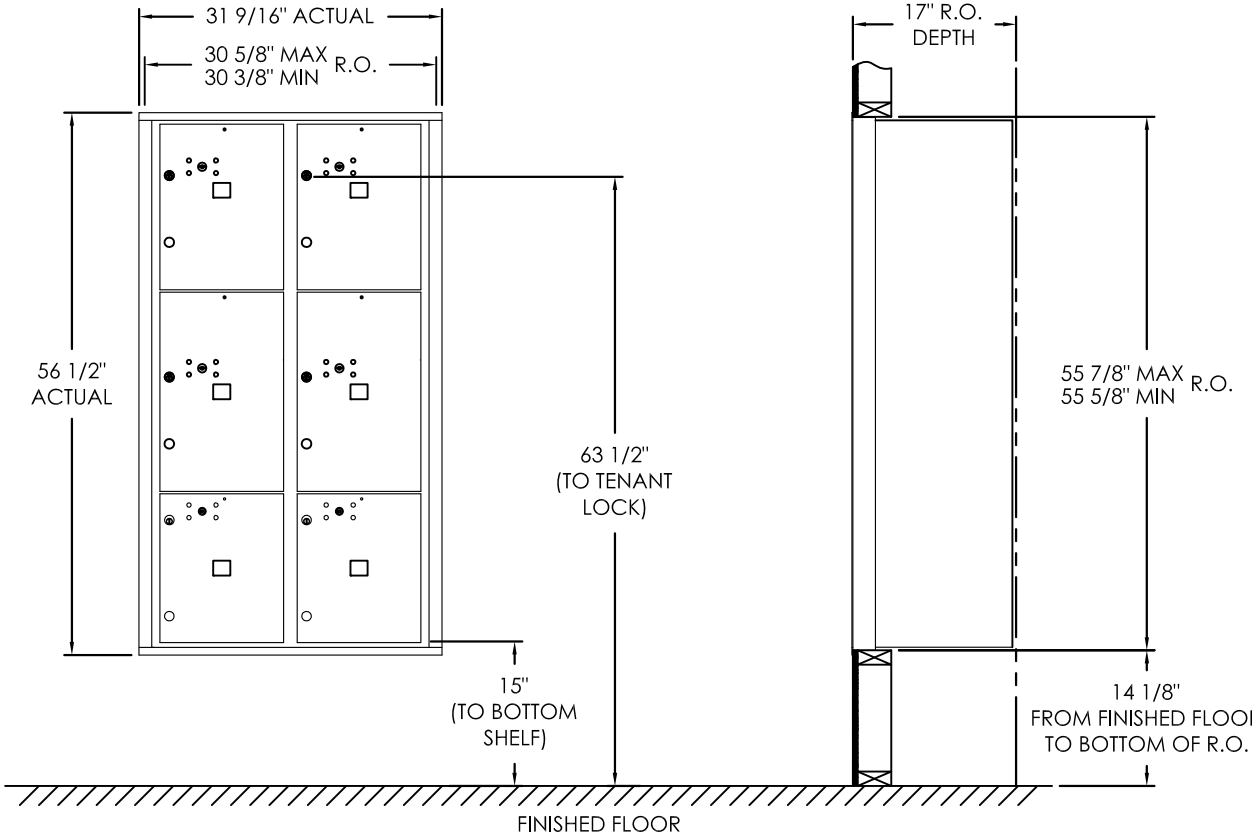

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
PARCEL	PL15	15" H x 12" W x 15" D	2
PARCEL	PL5	17" H x 12" W x 15" D	2
PARCEL	PL6	20-1/2" H x 12" W x 15" D	2

Notes:

1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
   a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
   b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
   c. No patron (tenant) lock shall be positioned more than 67" AFF.
   d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
   e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. This 4C mailbox can also be used for private applications.
3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

MODEL 4C16D-6P	REV E
SCALE NONE	LAST REV DATE 01/13/2021
DRAWING NUMBER 4C16D-6PCS	DRAWN BY RAK